


Tree Shear Swivel Option

Part # TSWV

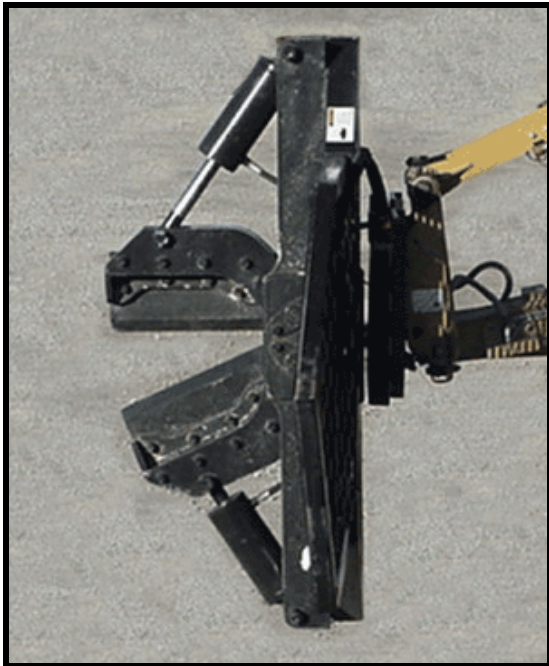

The **Tree Shear Swivel** option allows the operator the flexibility of cutting and trimming tree limbs that might be interfering with field edges, etc. This option is manually operated. It can be placed in either the standard horizontal position for cutting trees at ground level or be placed in a vertical position for cutting tree limbs.

Operating Instructions

- Remove the two 3/4" bolts.
- After removing the bolts, raise the tree shear approximately four feet off the ground & manually turn the shear vertically.
- Replace one of the bolts & tighten with 200 Ft/Lbs of torque.
- Cut desired limbs & then reverse the procedure to cut horizontally again!

Features

- 2" Machined and Hardened Pin
- 1/4" x 2" x 2" Square Tubing Frame

Available for 5", 12" or 20" Shears!



Suggested List Price Pg 959